

SWING GATES

GATE-GS SLIM

GATE-GS SLIM has a compact size and quite easy to use. When receiving a command to permit passage of the drive bar turns 90° and after passage return to its original position. The primary purpose of the Servo-Type Swing Gate is single or dual direction control of pedestrian access for industrial enterprises, administrative establishments, banks, offices, shops, stations and other sites. Due to its unique shape and variety of models, it can suit any interior.



*ELEGANCE, LIGHTNESS AND SIMPLICITY MAKE THE SERVO-TYPE SWING GATE
INDISPENSABLE AS A PART OF ACCESS CONTROL SYSTEM*

 **550/900**^{*}
mm
PASSAGE WIDTH

 **IP 41-65**^{**}
PROTECTIVE LEVEL


PASSAGE FOR DISABLED


MOTORIZED


BI-DIRECTIONAL

Advantages

- Extra slim gate post - only 101 mm
- Solution for disabled and trolley access
- Appropriate addition to other TiSO turnstiles
- Successful combination of affordable price and high quality
- Steadfast housing suitable for high traffic areas
- Can be integrated with any type of access control systems
- Low power consumption
- Left hand, right hand and double-sided opening are available
- Low noise system operation
- Gate housing could be adapted for both indoor and outdoor installations
- Can be mounted on a mobile platform (CartPoland Frame-M)

Standard

- 3 types of LED indication (green, red, blue)
- Wired remote control panel

Options

- Connection to additional external stand with integrated passes counter/RFID device/coin acceptor push button/fingerprint/barcode/QR-code reader etc.)
- Radio controller
- Heating function for external installation
- Automatic opening when power goes off
- Passage width may vary upon client's request

* other width available optionally

** first figure is standard, all other available upon request



CartPoland, Maciej Twardowski
Wólka Mińska ul. Olszowa 5,
05 - 300 Mińsk Mazowiecki

maciej@cartpoland.pl, Tel.: +48 606 773 276
inka@cartpoland.pl, Tel.: +48 795 15 83 20
www.cartpoland.pl | bramkiobrotowe.eu

Technical Specifications:

Width, mm	722-1022
Diameter, mm	101
Height, mm	1000
Weight, kg (not more)	50
Mechanism	Motorized

Controlled by:



access control system;




manual control

When power goes OFF both directions are free.

Electrical Specifications:

- Voltage:
 - from the AC (100-240)V, 50/60Hz;
 - from a DC source 12 V;
- Maximum power consumption 55W per pass;

GATE-GS SLIM

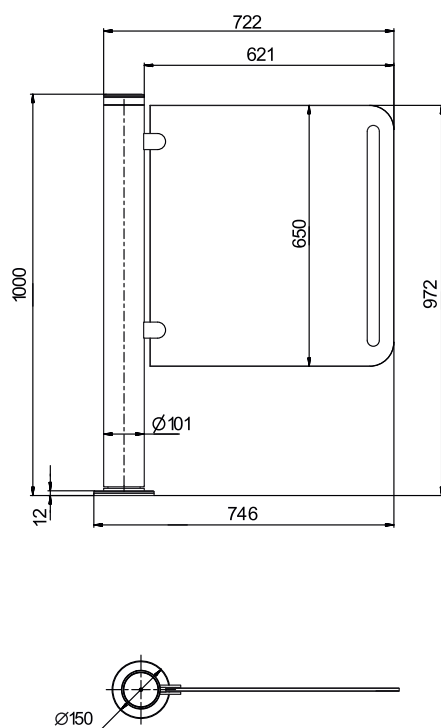

Materials

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL

Installation areas:

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Centers
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions
- others

*GATE-GS SLIM for disabled and trolley access is available

