

SWING GATES

GATE-TTS

GATE-TTS is a cost-effective entrance solution used for disabled and trolley access. Telescopic tubes provide different passage widths. The primary purpose of the Servo-Type Swing Gate is single or dual direction control of pedestrian access for any objects. The initial position locking gear underlies the operation of the Servo-Type Swing Gate.



UNIQUE TELESCOPIC ADJUSTABLE FLAG

ALLOWS TO FIT THE GATE TO ANY PASSAGE

 650/1100*
mm
PASSAGE WIDTH

 IP 41-65**
PROTECTIVE LEVEL


PASSAGE FOR DISABLED


MOTORIZED


BI-DIRECTIONAL

Advantages

- Adjustable tube makes GATE-TTS appropriate for installation sites where passage width is unknown in advance
- Solution for disabled and trolley access
- Appropriate addition to other CartPoland turnstiles
- Successful combination of affordable price and high quality
- Steadfast housing suitable for high traffic areas
- Can be integrated with any type of access control systems
- Low power consumption
- Left hand, right hand and double-sided opening are available
- Low noise system operation
- Gate housing could be adapted for both indoor and outdoor installations

Standard

- Wired remote control panel

Options

- Connection to additional external stand with integrated passes counter/RFID device/coin acceptor push button/fingerprint/barcode/QR-code reader etc.)
- Radio controller
- Heating function for external installation
- Automatic opening when power goes off
- Passage width may vary upon client's request

* other width available optionally.

** first figure is standard, all other available upon request.



CartPoland, Maciej Twardowski
Wólka Mińska ul. Olszowa 5,
05 - 300 Mińsk Mazowiecki

maciej@cartpoland.pl, Tel.: +48 606 773 276
inka@cartpoland.pl, Tel.: +48 795 15 83 20
www.cartpoland.pl | bramkiobrotowe.eu

Technical Specifications:

Width, mm	854-1204
Diameter, mm	204
Height, mm	1000
Weight, kg (not more)	45
Mechanism	Motorized

Controlled by:



access control system;





manual control

When power goes OFF both directions are free.

Electrical Specifications:

- Voltage:
 - from the AC (100-240)V, 50/60Hz;
 - from a DC source 12 V;
- Maximum power consumption 55W per pass;

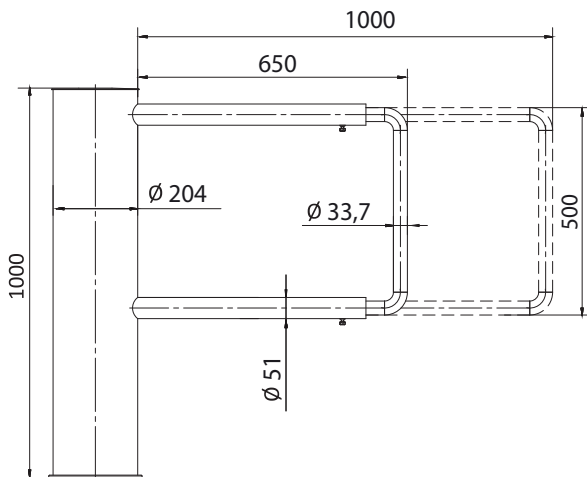


Materials

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL

Installation areas:

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Centers
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions
- others

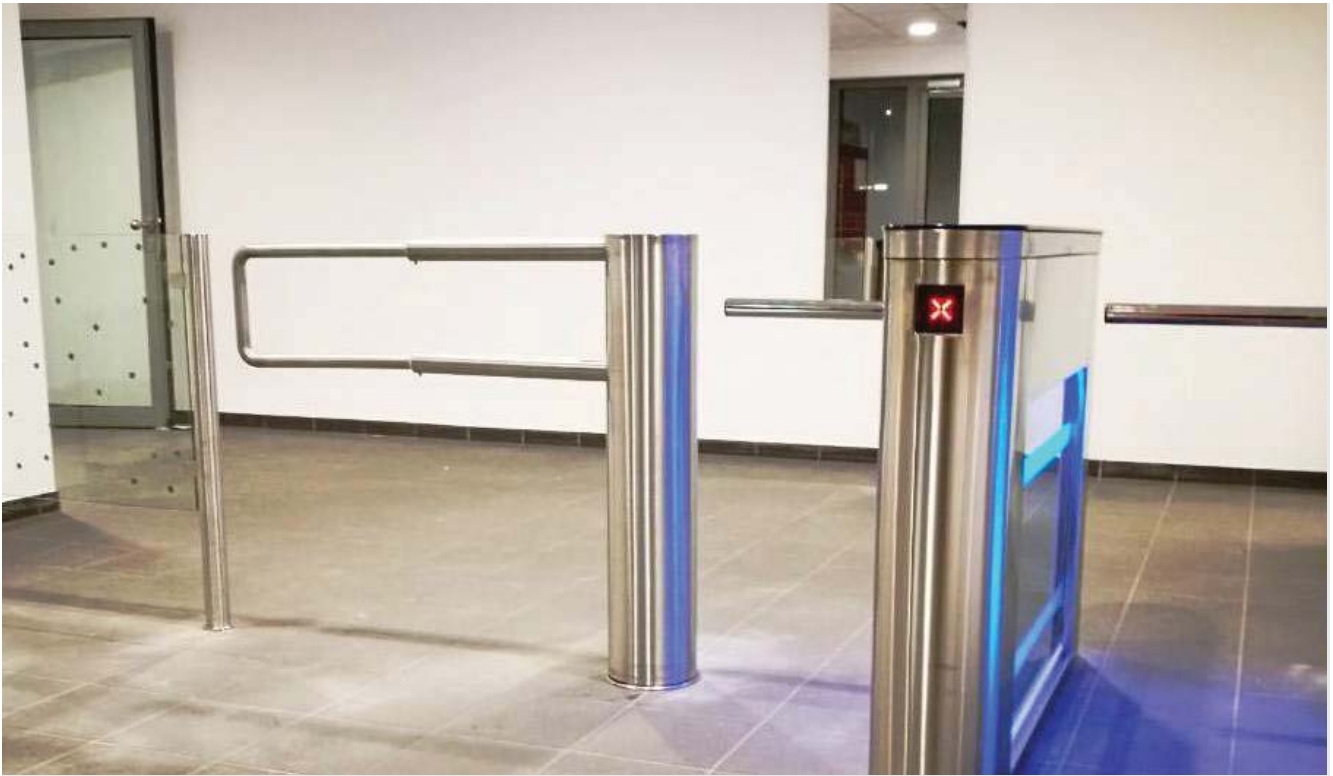

CartPoland, Maciej Twardowski
Wólka Mińska ul. Olszowa 5,
05 - 300 Mińsk Mazowiecki

maciej@cartpoland.pl, Tel.: +48 606 773 276
inka@cartpoland.pl, Tel.: +48 795 15 83 20
www.cartpoland.pl | bramkiobrotowe.eu